
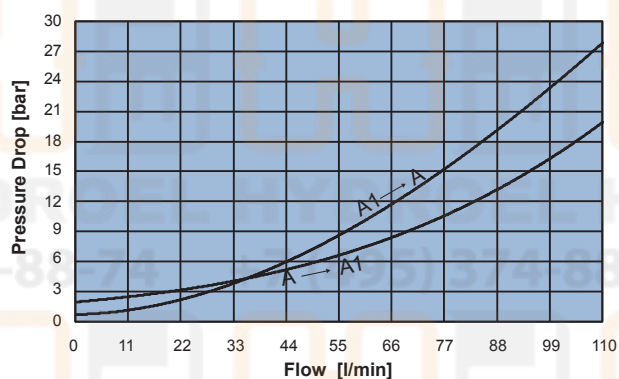
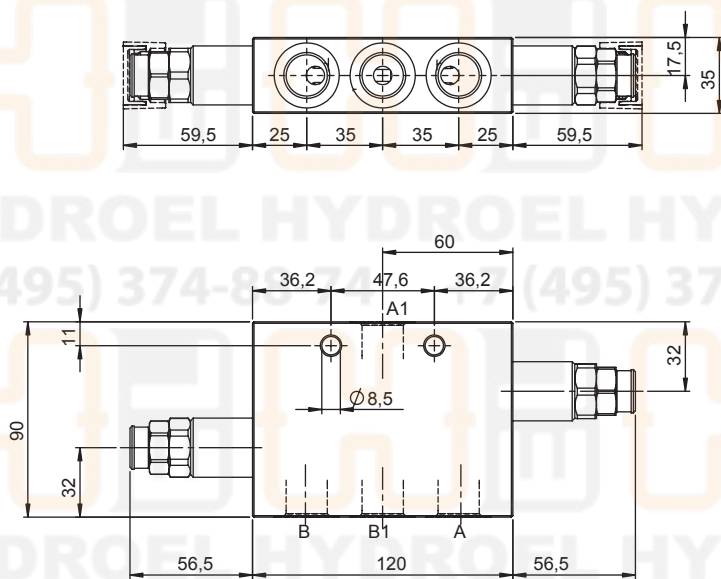


DOUBLE ACTING COUNTERBALANCE VALVE

- Flow. **110 l/min**
- Max working pressure. **410 bar**
- Compensation. **Not Compensated**
- Weight. **3 Kg**
- Tamper proof cap. **cod. 9021030190**

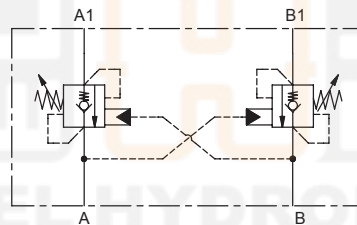

Note:

- Pressure setting must be 30% higher than pressure induced by the load.
- Back pressure can influence the opening pressure (LHD10X-C is recommended for circuits with high back pressure)

Ordering code

H 1 0 3 0 N S

PILOT RATIO	
40	4:1

SPRINGS	2	4
Setting range min.-max. [bar]	60 - 210	120 - 410
Pressure Increase [bar/turn]	52	85
Standard setting 4 l/min [bar]	200	350

PORTS	04
A,A1,B,B1	G 1/2"