
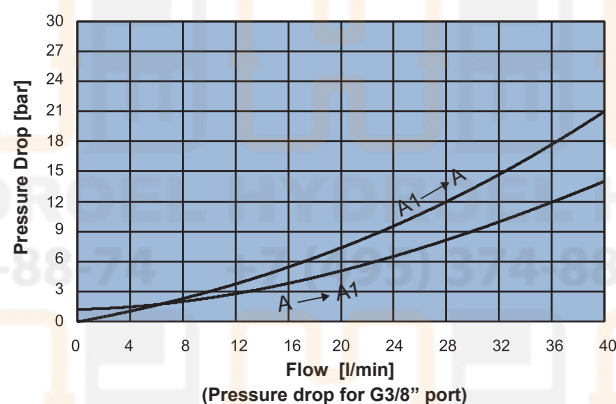
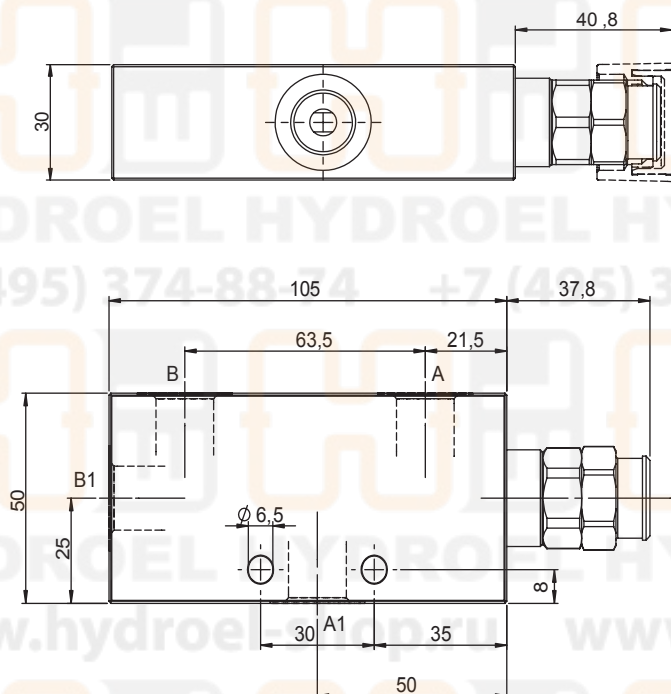


SINGLE ACTING COUNTERBALANCE VALVE

- Flow..... **40 l/min**
- Max working pressure..... **350 bar**
- Compensation..... **Not Compensated**
- Weight..... **0,75 Kg**
- Tamper proof cap..... **cod.9021030190**



Note:

- Pressure setting must be 30% higher than pressure induced by the load.
- Back pressure can influence the opening pressure (LHD03X-C is recommended for circuits with high back pressure)

Ordering code

H 3 0 0 4 N **S** **0 0**

PILOT RATIO	
41	4:1+dia.0,5mm

SPRINGS	2	3
Setting range min.-max. [bar]	80 - 210	150 - 350
Pressure Increase [bar/turn]	41	100
Standard setting 4 l/min [bar]	200	350

PORTS	03
A,B,A1,B1	G 3/8"