
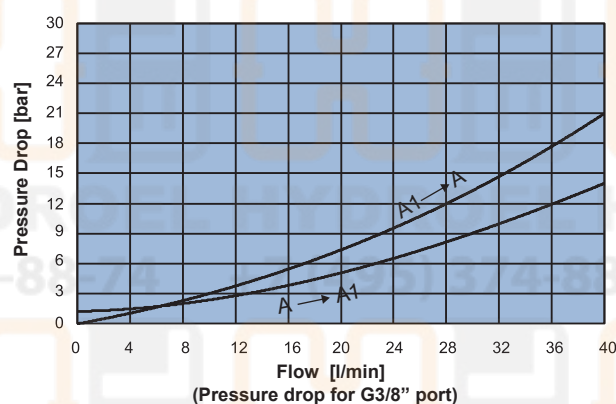
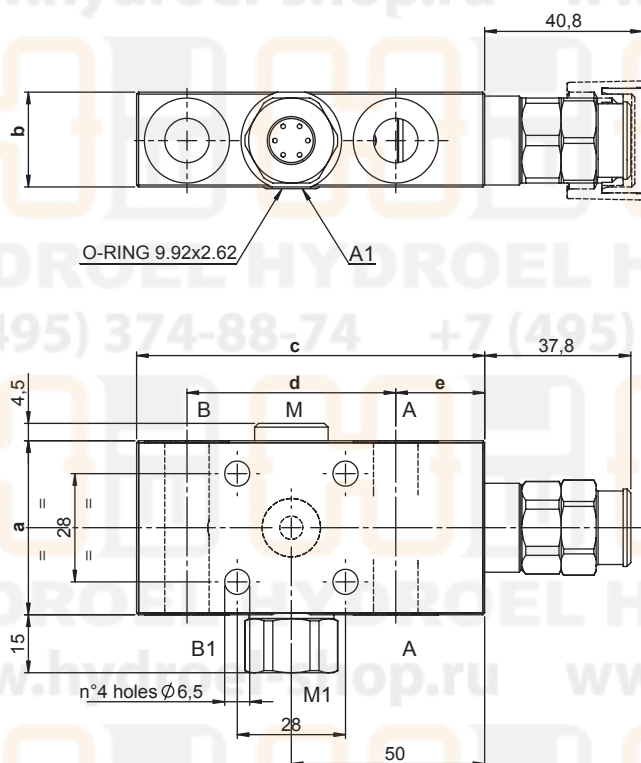


SINGLE ACTING COUNTERBALANCE VALVE FLANGED 28x28

- Flow..... **40 l/min**
- Max working pressure..... **350 bar**
- Compensation..... **Not Compensated**
- Weight G 1/4"..... **0,8 Kg**
- Weight G 3/8"..... **1 Kg**
- Tamper proof cap..... **cod. 9021030190**



Note:

- Pressure setting must be 30% higher than pressure induced by the load.
- Back pressure can influence the opening pressure (LHD03X-C is recommended for circuits with high back pressure)

	a	b	c	d	e
02	45	24,5	90	54	23
03	50	29,5	95	59	21

Ordering code

H 3 0 0 5 N **S** **0 0**

PILOT RATIO	
43	4:1

SPRINGS	2	3
Setting range min.-max. [bar]	80 - 210	150 - 350
Pressure Increase [bar/turn]	41	100
Standard setting 4 l/min [bar]	200	350

PORTS	02	03
A,B,B1	G 1/4"	G 3/8"
A1	Ø 6	Ø 6
M	G 1/4"	G 1/4"