
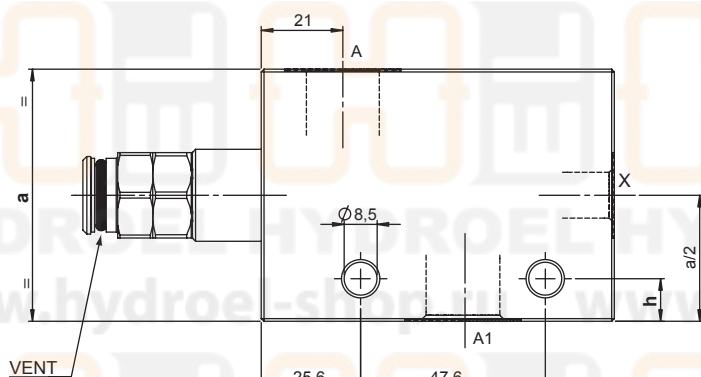
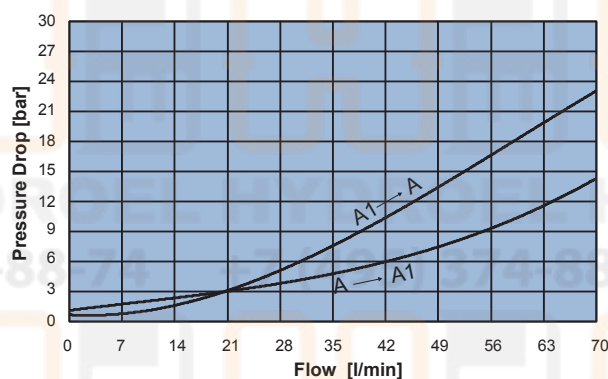
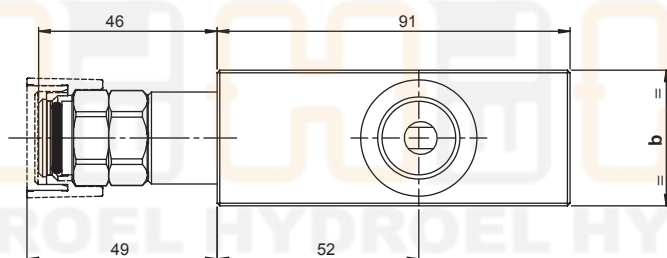


SINGLE ACTING FULLY COMPENSATED COUNTERBALANCE VALVE

- Flow **70 l/min**
- Max working pressure **350 bar**
- Compensation **Fully Compensated**
- Weight G 3/8" **1,25 Kg**
- Weight G 1/2" **1,55 Kg**
- Tamper proof cap. **cod. 9021030190**



Note:

- Pressure setting must be 30% higher than pressure induced by the load.

- To be used only with A/B closed center spools.

	a	b	h
03	55	30	7
04	65	35	11

Ordering code

H 5 0 0 1 C **S** **0 0**

PILOT RATIO	
40	4:1
90	9:1

SPRINGS	rp 4:1		rp 9:1	
	2	3	2	3
Setting range min.-max. [bar]	60 - 210	120 - 350	80 - 250	190 - 350
Pressure Increase [bar/turn]	62	114	50	121
Standard setting 4 l/min [bar]	200	350	200	350

PORTS	03	04
A,A1	G 3/8"	G 1/2"
X	G 1/4"	G 1/4"