
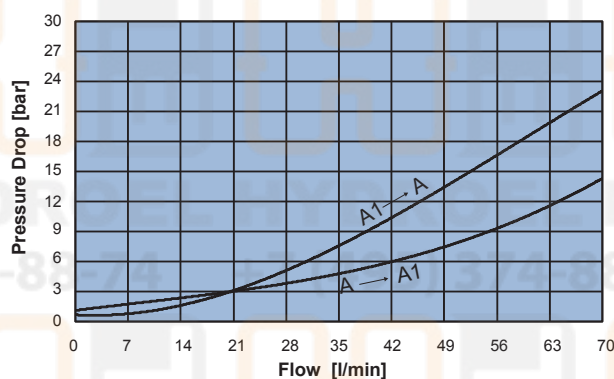
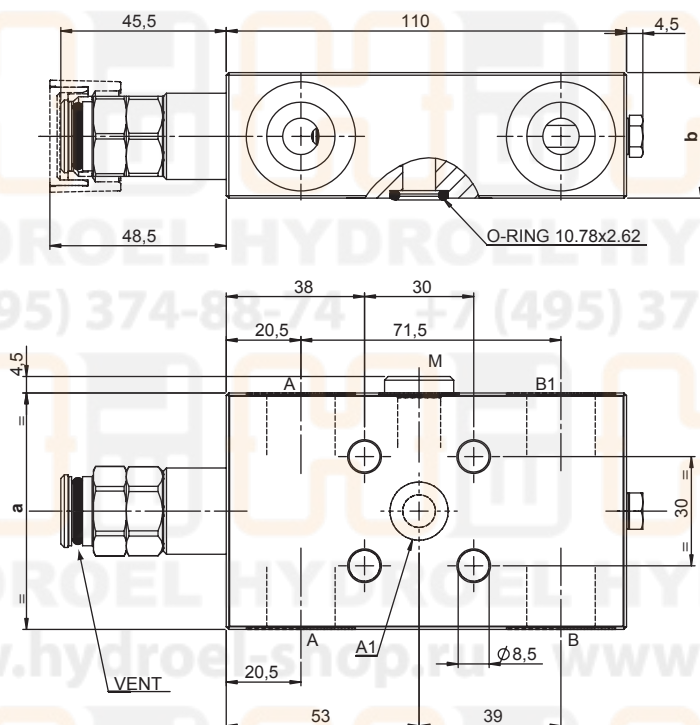


**SINGLE ACTING FULLY COMPENSATED COUNTERBALANCE VALVE - A1 FLANGED 30x30**

- Flow ..... **70 l/min**
- Max working pressure ..... **350 bar**
- Compensation ..... **Fully Compensated**
- Weight G 3/8" ..... **1,3 Kg**
- Weight G 1/2" ..... **1,75 Kg**
- Tamper proof cap. .... **cod. 9021030190**



**Note:**

- Pressure setting must be 30% higher than pressure induced by the load.

- To be used only with A/B closed center spools.

|           | a  | b    |
|-----------|----|------|
| <b>03</b> | 55 | 29,5 |
| <b>04</b> | 65 | 34,5 |

**Ordering code**

**H 5 0 0 5 C**     **S**     **0 0**

| PILOT RATIO |            |
|-------------|------------|
| <b>40</b>   | <b>4:1</b> |

| SPRINGS                        | 2        | 3         |
|--------------------------------|----------|-----------|
| Setting range min.-max. [bar]  | 60 - 210 | 120 - 350 |
| Pressure Increase [bar/turn]   | 62       | 114       |
| Standard setting 4 l/min [bar] | 200      | 350       |

| PORTS  | 03     | 04     |
|--------|--------|--------|
| A,B,B1 | G 3/8" | G 1/2" |
| A1     | Ø 9    | Ø 9    |
| M      | G 1/4" | G 1/4" |