
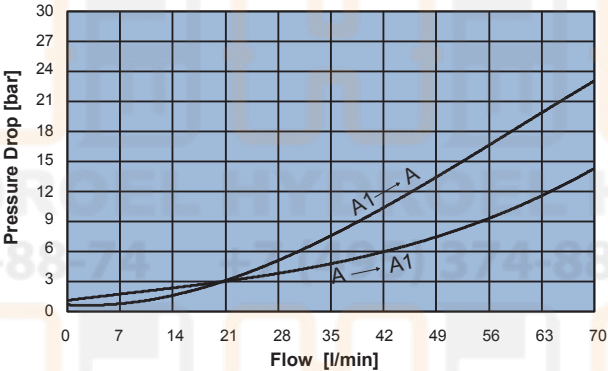
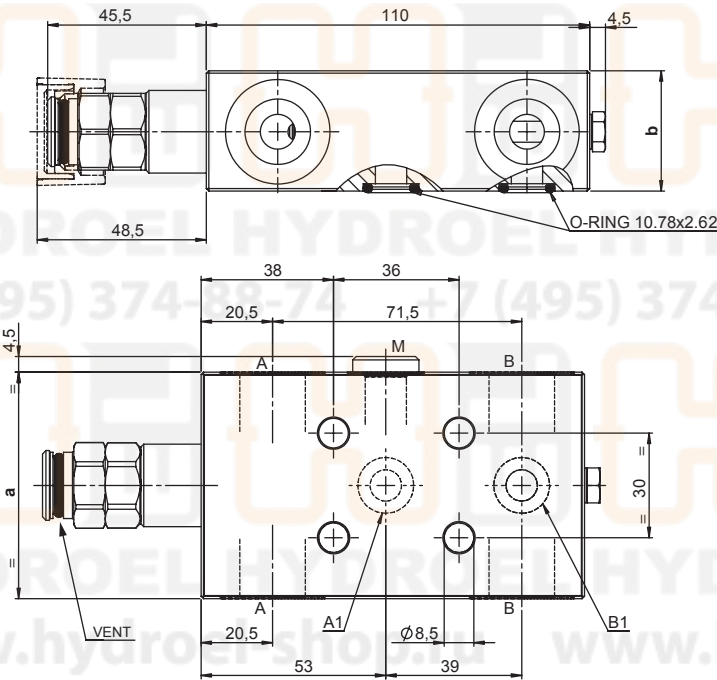


SINGLE ACTING COUNTERBALANCE VALVE FLANGED 30x36

- Flow.....70 l/min
- Max working pressure.....350 bar
- Compensation.....Fully Compensated
- Weight G 3/8".....1,5 Kg
- Weight G 1/2".....1,7 Kg
- Tamper proof cap.....cod. 9021030190



Note:
- Pressure setting must be 30% higher than pressure induced by the load.
- To be used only with A/B closed center spools.

Table with 2 columns: a, b. Rows: 03 (55, 29,5), 04 (65, 34,5).

Ordering code

H 5 0 0 6 C [] [] S [] 0 0

Table with 3 main sections: PILOT RATIO, SPRINGS, and PORTS. PILOT RATIO: 40, 4:1. SPRINGS: 2, 3. PORTS: 03, 04.

