
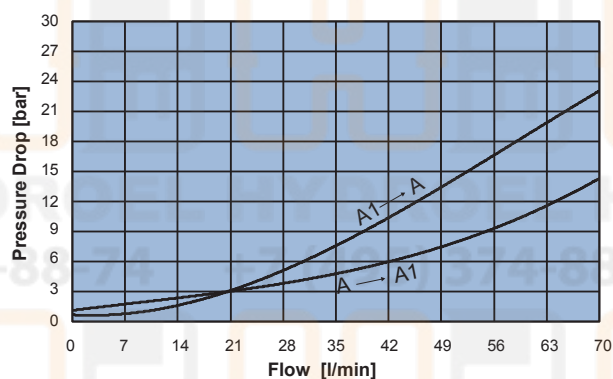
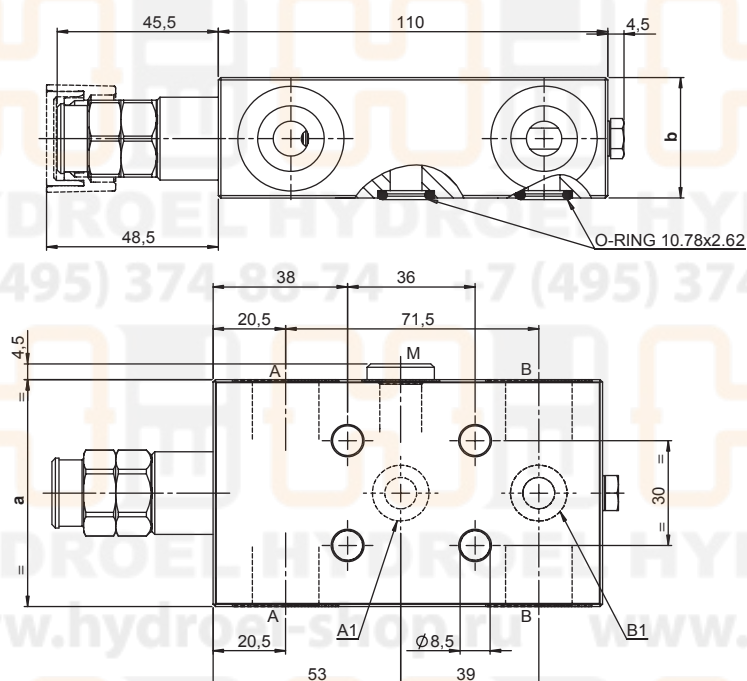


SINGLE ACTING COUNTERBALANCE VALVE FLANGED 30x36

- Flow **70 l/min**
- Max working pressure **350 bar**
- Compensation **Not Compensated**
- Weight G 3/8" **1,3 Kg**
- Weight G 1/2" **1,7 Kg**
- Tamper proof cap. **cod. 9021030190**



Note:

- Pressure setting must be 30% higher than pressure induced by the load.
- Back pressure can influence the opening pressure (LHD05X-C is recommended for circuits with high back pressure)

	a	b
03	55	29,5
04	65	34,5

Ordering code

H 5 0 0 6 N **S** **0 0**

PILOT RATIO	
40	4:1

SPRINGS	2	3
Setting range min.-max. [bar]	60 - 210	120 - 350
Pressure Increase [bar/turn]	62	114
Standard setting 4 l/min [bar]	200	350

PORTS	03	04
A,B	G 3/8"	G 1/2"
A1,B1	Ø 9	Ø 9
M	G 1/4"	G 1/4"